

533,922

Rec'd USPTO 03 MAY 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/042413 A1

(51) International Patent Classification: G01R 31/28 (74) Agent: VOLMER, Georg; Philips Intellectual Property & Standards GmbH, Weiss hausstr. 2, 52066 Aachen (DE).

(21) International Application Number:

PCT/IB2003/004892

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:

3 November 2003 (03.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

02102545.7 6 November 2002 (06.11.2002) EP

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INSPECTING METHOD AND APPARATUS FOR A LED MATRIX DISPLAY

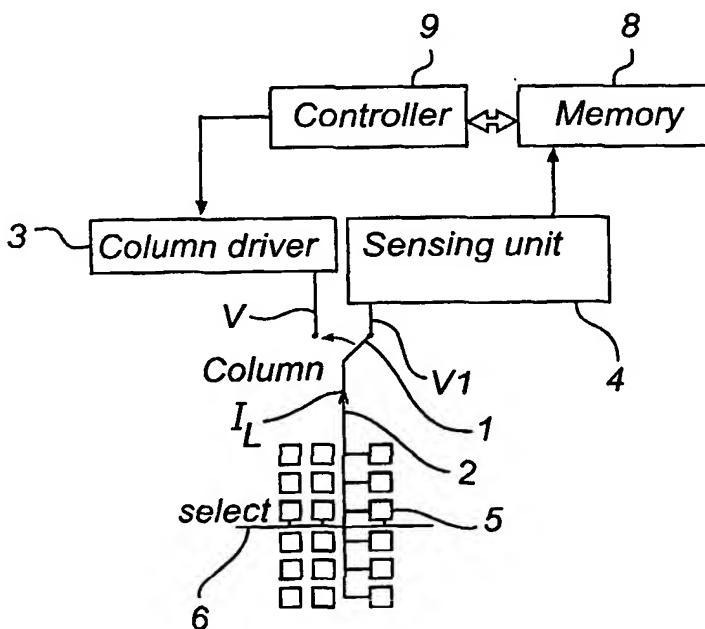

(57) Abstract: A method for sensing a light emissive element in an active matrix display pixel cell (20; 20') further comprising a data line (21) connectable to a drive element (24) and to a first electrode (29) of the emissive element (25). The data line (21) is connected to the anode (29) of the emissive element (25), and a sensing voltage (V1) to reverse bias the emissive element (25), and detecting any leakage current (IL) flowing through the emissive element (25).

WO 2004/042413 A1